

**This specification** describes the situation of the Belgacom network and services. It will be subject to modifications for corrections or when the network or the services will be modified. Please take into account that modifications can appear at any moment. Therefore, the reader is requested to check regularly with the most recent list of available specifications that the document in one's possession is the latest version.

Belgacom can't be held responsible for any damages due to the use of a version of this specification which is not included in the most recent list of available specifications (list always available with a request to the e-mail address mentioned in the underneath paragraph).

Whilst every care has been taken in the preparation and publication of **this document**, errors in content, typographical or otherwise, may occur. If you have remarks concerning its accuracy, please send a mail to the following address [belgacom.uni.spec@belgacom.be](mailto:belgacom.uni.spec@belgacom.be) and your remark will be transmitted to the right Belgacom department.

The User Network Interface Specifications published via Internet are available for your information but have no official value. The only documents with an official value are printed on a specific paper.

If you want **to get an official version of this User Network Interface Specification**, please order it by sending your request by mail to [belgacom.uni.spec@belgacom.be](mailto:belgacom.uni.spec@belgacom.be)

**COLO TO COLO OR COLO TO POP BACKHAUL LEASED LINE**

**Provision of 2048 kbit/s digital links**

**Table of Contents**

- 0. DOCUMENT HISTORY..... 1**
- 1. INTRODUCTION..... 2**
- 2. COLO TO COLO OR COLO TO POP BACKHAUL LEASED LINE CHARACTERISTICS ..... 3**
  - 2.1. Transfer rate..... 3
    - 2.1.1. Leased line timing..... 3
    - 2.1.2. Information transfer rate ..... 3
  - 2.2. Information transfer susceptance..... 3
  - 2.3. Structure..... 3
  - 2.4. Establishment of communication ..... 3
  - 2.5. Symmetry ..... 3
  - 2.6. Connection configuration ..... 3
  - 2.7. Network performance..... 4
    - 2.7.1. Transmission delay..... 4
    - 2.7.2. Jitter ..... 4
    - 2.7.3. Performance level..... 4
- 3. END POINT INTERFACE PRESENTATION ..... 5**
  - 3.1. Physical characteristics..... 5
  - 3.2. Electrical characteristics..... 5
  - 3.3. ElectroMagnetic Compatibility (EMC) ..... 5
- ANNEX 1 ..... 6**
- ANNEX 2 ..... 7**

## 0. Document history

Every update of this document results in a complete new version with new version number and release date.

| Version | Date        | Main or important changes since previous version                |
|---------|-------------|---|
| 1.0     | 12 JUN 2002 | <ul style="list-style-type: none"><li>• First version</li></ul> |

## 1. Introduction

This document contains the technical specifications of the Belgacom transparent 2 Mbit/s Colo to Colo or Colo to PoP Backhaul Leased Line service. Basically, it is the intention of Belgacom and the OLO to co-operate for the joint establishment of an end-to-end 2 Mbit/s transparent leased line path.

These specifications are based on a generic model as shown in annex 1.

The Colo to Colo Backhaul Leased Line of Belgacom is presented to the OLO via an “interface presentation” at the related End Point, namely the EP<sub>OLO</sub>. These EPs comprise all physical connections and their technical access specifications that form part of the Belgacom transmission network. The EP is presented by means of an electrical equipment which is an integral part of the Belgacom Colo to Colo Backhaul Leased Line and which is referred to as the End Point Unit (EPU). For the description of the Belgacom Colo to Colo Backhaul Leased Line service for 2 Mbit/s transparent leased lines, the EPU is considered as being contained within the Belgacom Colo to Colo Backhaul Leased Line.

The Colo to PoP Backhaul Leased Line of Belgacom is presented to the OLO via an “interface presentation” at the related End Point, namely the EP<sub>OLO</sub>. These EPs comprise all physical connections and their technical access specifications that form part of the Belgacom transmission network. The EP is presented by means of an electrical equipment which is an integral part of the Belgacom Colo to PoP Backhaul Leased Line and which is referred to as the End Point Unit (EPU). For the description of the Belgacom Colo to PoP Backhaul Leased Line service for 2 Mbit/s transparent leased lines, the EPU is considered as being contained within the Belgacom Colo to PoP Backhaul Leased Line. On one end, the EPU is located in a LEX or in an AGE, on the other end, the EPU is located in a LEX and offer interface to the local tail to the PoP.

## 2. Colo to Colo or Colo to PoP Backhaul Leased Line characteristics

### 2.1. Transfer rate

#### 2.1.1. Leased line timing

There's no timing provided from the Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line. On the other hand, the Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line is capable of carrying timing provided by the OLO within the limits of 2048 kbit/s  $\pm$  50 ppm as specified by ITU-T Recommendation G.703.

#### 2.1.2. Information transfer rate

The Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line is capable of transferring an information rate of 2048 kbit/s  $\pm$  50 ppm in each direction.

### 2.2. Information transfer susceptance

The Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line is capable of transferring unrestricted digital information.

### 2.3. Structure

The Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line shall not be structured by Belgacom; the full bit rate of 2048 kbit/s shall be available to the OLO for unrestricted digital information transfer.

### 2.4. Establishment of communication

Establishment or release of the Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line shall not require any protocol exchange or other intervention by the OLO.

### 2.5. Symmetry

The Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line shall be symmetrical, i.e. each direction of transmission shall have the same nominal characteristics, although the actual values shall be independent.

### 2.6. Connection configuration

The Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line configuration is point-to-point.

## 2.7. Network performance

### 2.7.1. Transmission delay

The one way delay through the Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line shall be less than  $(5 + 0.01G)$  ms, where G is the geographical distance in kilometers.

### 2.7.2. Jitter

The maximum jitter at the output port of the EP<sub>OLO</sub> as well as the input jitter tolerance at the EP<sub>OLO</sub> shall be as specified in ITU-T Recommendation G.823.

### 2.7.3. Performance level

The overall end-to-end error performance level of the 2048 kbit/s transparent leased line path shall be based on the model mentioned in ITU-T Recommendation G.826.

### **3. End point interface presentation**

#### **3.1. Physical characteristics**

The physical connection arrangements for the EP<sub>OLO</sub> of the Belgacom transparent 2048 kbit/s digital Colo to Colo or Colo to PoP Backhaul Leased Line shall consist of two 1.6/5.6 coax-connectors (75 Ohms version of the G.703-interface), by using one coaxial pair in each transmission direction complying with IEC 169-13.

#### **3.2. Electrical characteristics**


The electrical characteristics of the EP of the Belgacom 2048 kbit/s digital Colo to Colo or Colo to PoP Backhaul Leased Line are in accordance with ITU-T Recommendation G.703 (75 Ohms).

#### **3.3. ElectroMagnetic Compatibility (EMC)**

The network interface presentation fulfils to the EMC requirements which are imposed under the EMC Directive 89/336/EEC.

**ANNEX 1**

**Generic model for  
Colo to Colo or Colo to PoP Leased Line Specifications**

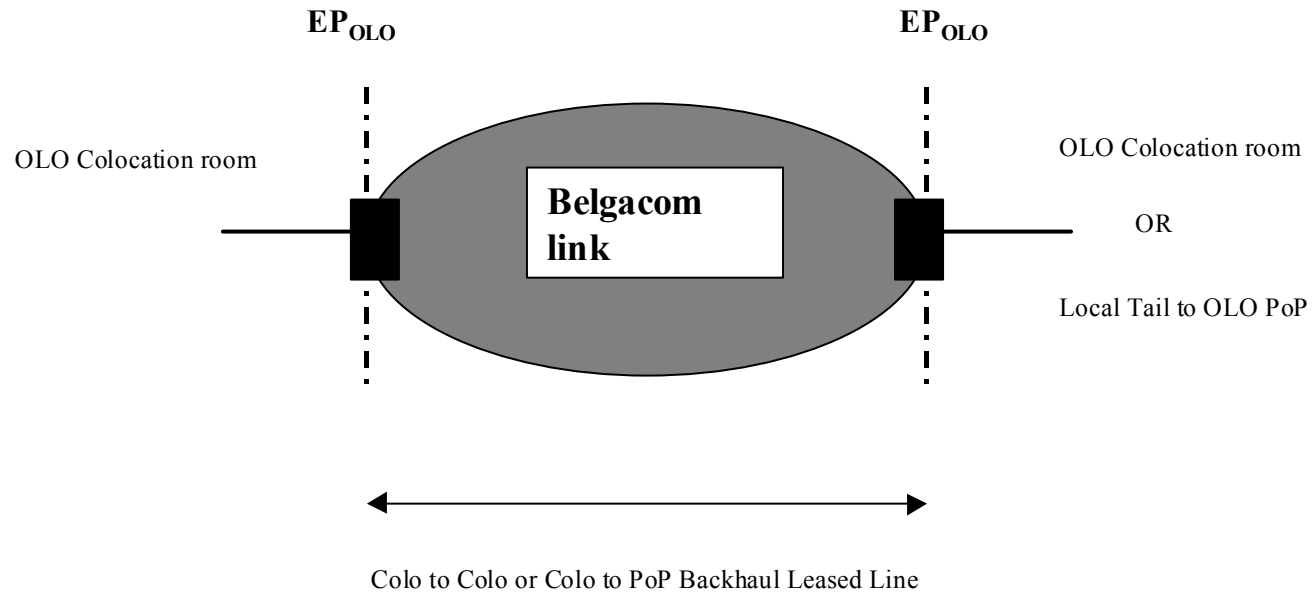

EP = End Point

## ANNEX 2

*Definitions, symbols and abbreviations.*

### **a) Definitions**

For the purpose of these technical specifications, the following definitions apply:

#### *Background block error ratio*

The ratio of errored blocks over all blocks within a specified measuring period, where neither are counted during unavailability periods nor during severely errored seconds.

#### *Errored block*

A block with one or more bit errors.

#### *Errored second*

A one-second period with one or more errored blocks.

#### *End Point (EP)*

All physical connections which form part of the Belgacom telecommunications network and which are necessary for access to and efficient communication through the Belgacom Colo to Colo or Colo to PoP Backhaul Leased Line.

#### *Severely errored second*

A one-second period which contains at least 30% errored blocks or at least one severely disturbed period.

### **b) Symbols and abbreviations**

For the purpose of these technical specifications, the following abbreviations apply:

|               |   |
|---------------|---|
| <u>CRC-4:</u> | <i>Cyclic Redundancy Check-4 bit.</i>                   |
| <u>DCE:</u>   | <i>Data Circuit-terminating Equipment.</i>              |
| <u>DTE:</u>   | <i>Data Terminal Equipment.</i>                         |
| <u>ES:</u>    | <i>Errored Seconds.</i>                                 |
| <u>ITU:</u>   | <i>International Telecommunication Union.</i>           |
| <u>EP:</u>    | <i>End Point.</i>                                       |
| <u>OLO:</u>   | <i>Other Licensed Operator.</i>                         |
| <u>Ppm:</u>   | <i>Parts per million</i>                                |
| <u>RGIE:</u>  | <i>Réglement Général des Installations Electriques.</i> |
| <u>SES:</u>   | <i>Severely Errored Seconds.</i>                        |
| <u>UI:</u>    | <i>Unit Interval.</i>                                   |